

TeleEye IR Domes



Vandal Resistant




3 Axis Mount




Ultra Hi-resolution

	IR Dome Camera		Outdoor IR Dome Camera		Outdoor IR Dome Camera	Outdoor IR Dome Camera	Outdoor IR Dome Camera
Model	DF183	DF187	DF263	DF267	DF288	DF292	DF295
Pick Up Device	1/3" interline transfer CCD		1/3" interline transfer CCD		1/3" interline transfer CCD	1/3" interline transfer CCD	1/3" interline transfer CCD
Horizontal Resolution	380 TVL	520 TVL	420 TVL	540 TVL	540 TVL	420 TVL	540 TVL
Lens	3.6mm		3.6mm		2.9mm ~ 10mm (Aspherical IR lens)	3.6mm	3.6mm
View Angle (Horizontal)	68°		68°		28.8° ~ 94.6°	68°	68°
Auto-iris Lens	-		-		Yes	-	-
Auto IR-cut Filter	-		-		Yes	-	-
IR LED / Effective Range	22 infrared LEDs / ~15m		24 infrared LEDs / ~15m		10 infrared LEDs / ~15m	24 infrared LEDs / ~15m	36 infrared LEDs / ~20m
Min. Illumination	0.1 Lux / F1.2 (IR OFF) 0.0 Lux (IR ON)	0.5 Lux / F1.2 (IR OFF) 0.0 Lux (IR ON)	0.5 Lux / F1.2 (IR OFF) 0.0 Lux (IR ON)	0.1 Lux / F1.2 (IR OFF) 0.0 Lux (IR ON)	0.13 Lux / F1.3 (IR OFF) 0.0 Lux (IR ON & IR filter removed)	0.5 Lux / F1.2 (IR OFF) 0.0 Lux (IR ON)	0.1 Lux / F1.2 (IR OFF) 0.0 Lux (IR ON)
Weather Proof Standard	-		IP66		IP66	IP66	IP66
Electronic Shutter	1/50 (1/60) to 1/100,000 sec		1/50 (1/60) to 1/100,000 sec		1/50 (1/60) sec	1/50 (1/60) to 1/100,000 sec	1/50 (1/60) to 1/100,000 sec
Electronic Shutter Control	Built-in		Built-in		On / Off switchable	Built-in	Built-in
Back Light Compensation	Built-in		-		On / Off switchable	-	-
S/N Ratio	More than 48dB (AGC off)	More than 45dB (AGC off)	More than 48dB (AGC off)		More than 50dB (AGC off)	More than 48dB (AGC off)	More than 48dB (AGC off)
White Balance	Auto		Auto		Auto	Auto	Auto
Video Output	1.0 Vp-p, 75Ω		1.0 Vp-p, 75Ω		1.0 Vp-p, 75Ω	1.0 Vp-p, 75Ω	1.0 Vp-p, 75Ω
Auto Gain Control	Yes		Yes		On / Off switchable	Yes	Yes
Power Source	DC 12V / 160 mA (IR OFF) 340 mA (IR ON)	DC 12V / 160 mA (IR OFF) 380 mA (IR ON)	DC 12V / 200 mA (IR OFF) 400 mA (IR ON)		DC 12V / 200 mA (IR OFF) 500 mA (IR ON)	DC 12V / 200 mA (IR OFF) 400 mA (IR ON)	DC 12V / 200 mA (IR OFF) 500 mA (IR ON)
Operating Temperature	-20°C ~ +50°C	-10°C ~ +50°C	-20°C ~ +50°C		-10°C ~ +50°C	-20°C ~ +50°C	-20°C ~ +50°C
Humidity	< 90%		-		-	-	-
Weight (g)	250		850	840	950	410	820


DF183 / DF187

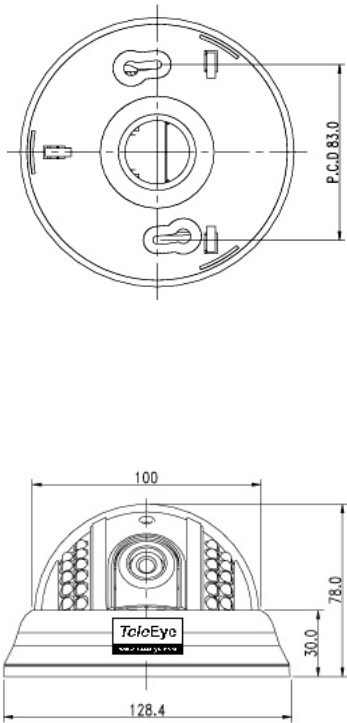


DF263 / DF267

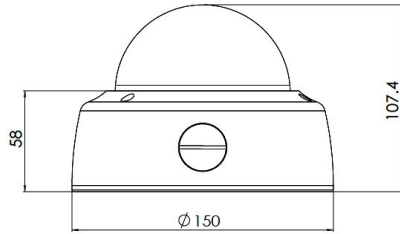






DF288

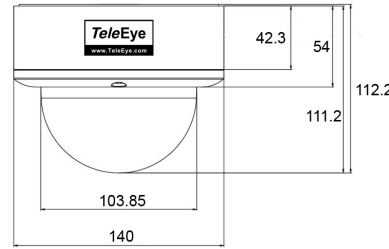

DF292

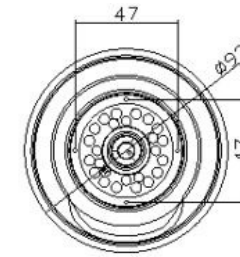

DF295

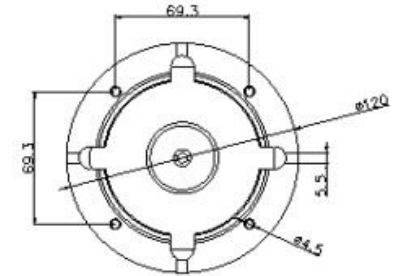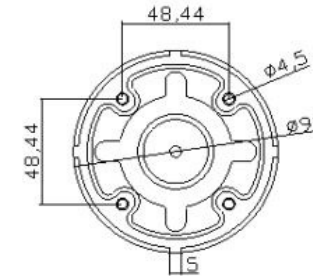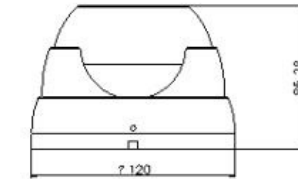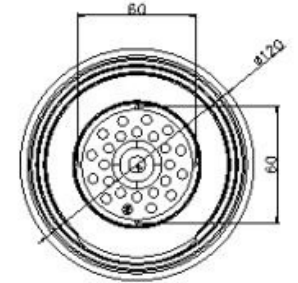

www.TeleEye.com

**TeleEye Group
Signal Communications Limited**

Units 202-203, 2/F, Laford Centre, 838 Lai Chi Kok Road, Kowloon, Hong Kong
International: (852) 2995 5996 Hong Kong: (852) 2995 5992 Fax: (852) 2995 5901
Email: info@TeleEye.com Web: www.TeleEye.com

TeleEye Europe Ltd.
4 Maidenhead Enterprise
Centre, Cordwallis Street,
Maidenhead,
Berkshire SL6 7BE,
United Kingdom
Tel: (44) 1628 776061
Fax: (44) 1628 407399
Email: info@TeleEye.co.uk

TeleEye (S) Pte Ltd.
10 UBI Crescent,
#06-09 Lobby A UBI Techpark
Singapore 408564
Tel: (65) 6745-3921
Fax: (65) 6742-1965
Email: sales@TeleEye.com.sg

**TeleEye Digital Technology
(Shenzhen) Co., Ltd.**
Room A602,
Shenzhen Virtual University Park,
Shenzhen Hi-Tech Industrial
Park,
Shenzhen, China
Tel: (86) 755-2671-2122
Fax: (86) 755-2671-2287
Email: info@TeleEye.com.cn

TeleEye Hrvatska
Kranjčevićeva 16
52100 Pula, Croatia
Tel: (385) 52-383-102
Fax: (385) 52-383-101
Email: info@TeleEye.hr

TeleEye Philippines Inc
291-H Del Monte Avenue
Quezon City
Metro Manila, Philippines
Tel: (63) 2-3650897
Fax: (63) 2-3651446
Email: contact@TeleEye.com.ph

TeleEye (Mauritius) Ltd.
Lamberty Street, Vacoas –
Mauritius
Tel: (230) 686 5238
Fax: (230) 698 2179
Email: info@TeleEye.com.mu

TeleEye (South Africa) (Pty) Ltd
Unit 4, No. 4 Homestead Avenue,
Bryanston
P O Box 2375, Saxonwold 2132
South Africa
Tel: (27) 11 557 9200
Fax: (27) 11 706 3847
Email: info@TeleEye.co.za

**Companhia TeleEye
(Macau) Limitada**
D'Assumpção, n°180,
Edifício Tong Nam Ah
Centro Comercial, 10°
andar J, em Macau
Tel: (853) 2857 5933
Fax: (853) 2857 5911
Email:
info@TeleEye.com.mo